

# Save energy with TC-tangential belts

The state-of-the-art TC-tangential belt range with polyester tensile member set a new standard in energy and cost savings on spinning, twisting and texturizing machines.


**The extraordinary efficiency can be explained with the following facts:**

- High longitudinal belt flexibility > low bending resistance
- High friction wear resistant cover > no slip, constant high spindle speed
- High dimensional stability > constant belt tension, consistent speed

Field tests and independent studies in many mills and on various machine types have proven that the replacement of polyamide belts with high-efficient TC-tangential belts result in **considerable energy cost savings!**

**4–6%**  
**energy**  
**savings**

- **higher efficiency**
- **lower energy consumption**
- **lower costs**

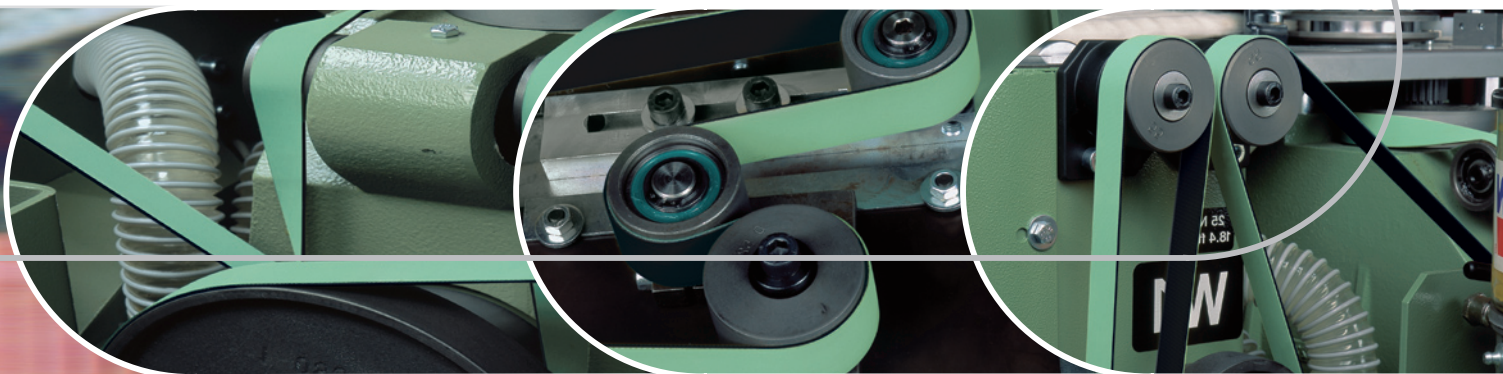

## Comparison example

Power studies made on Leewha TFO two-for-one twisters on Rajasthan Spinning & Weaving Mills Ltd. in India between Habasit TC-belts and competitor polyamide belts:

	Competitor polyamide belt	Habasit TC-35R	Competitor polyamide belt	Habasit TC-35/30ER
Count	2/18s		2/30s	
Spindle speed (rpm)	9100		10100	
Units consumed power (kw)	465,7	432,7	560,0	536,0
Units consumed energy (kWh)	24,31	22,82	23,33	22,33
<b>Energy saving with Habasit belt</b>	<b>6,10%</b>		<b>4,30%</b>	

## Features and benefits of TC-belts in brief

- High efficiency > energy cost saving
- Adhesive-free joining method > simple and fast joining system
- Excellent joining quality > enables high spindle speed
- High elastic modulus > consistent yarn quality
- Optimized design > low noise emission

## TC-belt range

	Belt thickness (mm)	Pulley diameter minimum (counter flection) (mm)	Tensile force for 1% elongation (k1% after running in) per unit of width (N/mm)	Nominal peripheral force per unit of width (N/mm)	Operating temperature admissible (continuous)	Friction cover pulley side			Friction cover whirl side		
						Material	Color	Structure	Material	Color	Structure
<b>TC-10EF</b>	1.8	25	5	10	-20/+70 °C	NBR	black	rough	NBR	green	fine
<b>TC-20EF</b>	2.0	25	10	21	-20/+70 °C	NBR	black	rough	NBR	green	fine
<b>TC-20/25EF</b>	2.5	50	11	23	-20/+70 °C	NBR	black	rough	NBR	green	fine
<b>TC-35ER</b>	2.5	50	18	38	-20/+70 °C	NBR	black	rough	NBR	green	rough
<b>TC-35/30ER</b>	3.0	50	18	38	-20/+70 °C	NBR	black	rough	NBR	green	rough
<b>TC-35/35ER</b>	3.5	70	18	38	-20/+70 °C	NBR	black	rough	NBR	green	rough
<b>TC-55ER</b>	3.0	70	26	53	-20/+70 °C	NBR	black	rough	NBR	green	rough



### Headquarters

Habasit AG  
 CH-4153 Reinach-Basel  
 Phone +41 61 715 15 15  
 Fax +41 61 715 15 55  
 E-mail info@habasit.com  
 www.habasit.com

Registered trade marks  
 Copyright Habasit AG  
 Subject to alterations

Printed in Switzerland  
 Publication Data  
 4250FLY.TYP-en0409HQR