




HabaSYNC® Timing Belt Covers

Habasit – Solutions in motion

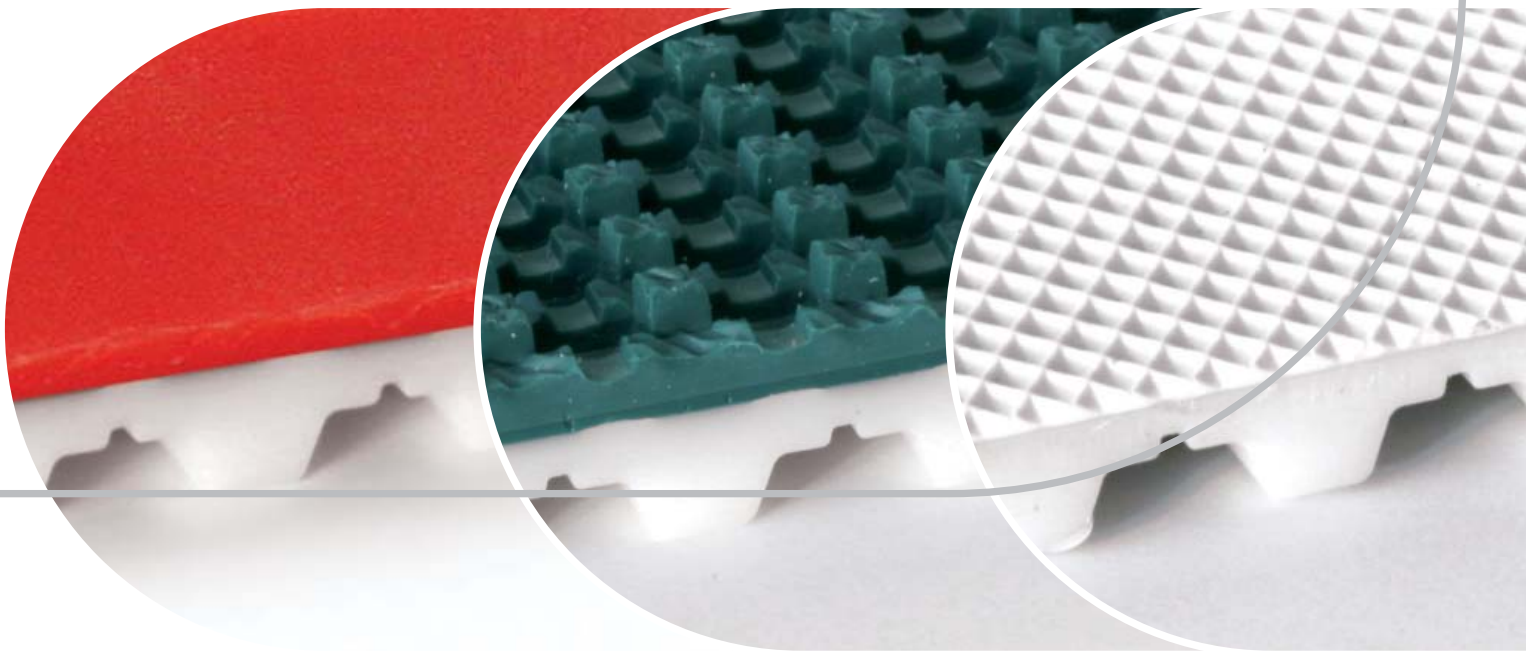


The right solution every time	3
Polyurethane covers	4
Elastomer covers	6
Polyvinyl chloride covers	8
Polyester covers	8
Foam covers	10
Special covers	10

This **disclaimer** is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals.

All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice.

EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.

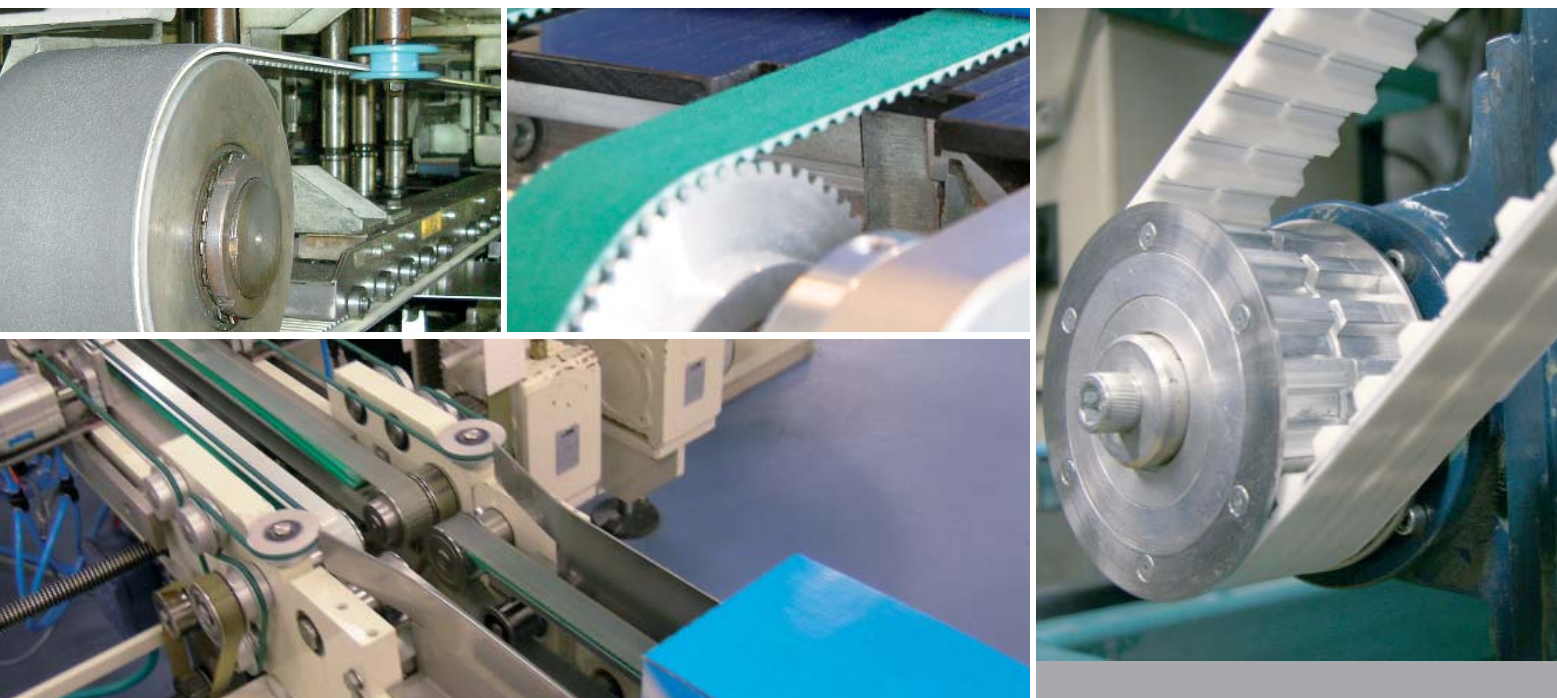

Habasit offers a broad selection of covers for its HabaSYNC® timing belts. Covers provide the friction needed to handle products so that they are correctly indexed and securely and effectively managed. Our covers are designed to cope with a wide variety of requirements and can thus guarantee reliable conveyance in every type of transport function and manufacturing application.

Some cover materials are applied during timing belt production, affording homogeneous structure benefits. Others are added later using heat lamination or adhesive bonding processes. Our expertise ensures that the materials are combined in every case using the most suitable procedures, thus delivering consistently optimized quality.


Covered HabaSYNC® timing belts can provide a combination of features that include:

- Abrasion resistance
- Chemical resistance
- Compressibility
- Electrostatic discharge – antistatic features
- Excellent release properties
- Gentle movement
- Heat resistance
- High or low coefficient of friction
- Shock absorption

As a result, belts can be used in multiple applications and in the most challenging conditions. The most appropriate and best performing conveying side cover always depends on the application and function. For example, soft for careful product handling in filling lines, or hard with additional wear resistance for abrasive environments. Chemical and thermal features meet the needs of food applications and materials handling processes at elevated temperatures.

Talk to us about your technical requirements. We love a challenge. Our fabrication specialists will be pleased to discuss all the options with you. Since we can put covers on all our HabaSYNC® timing belts, we will be able to satisfy your requirements with at least one of our specially designed high-tech products.

Please note that not all products are available as standard stock items in every country. Check with your local Habasit representative for availability within our worldwide service network, which you can find on: www.habasit.com.

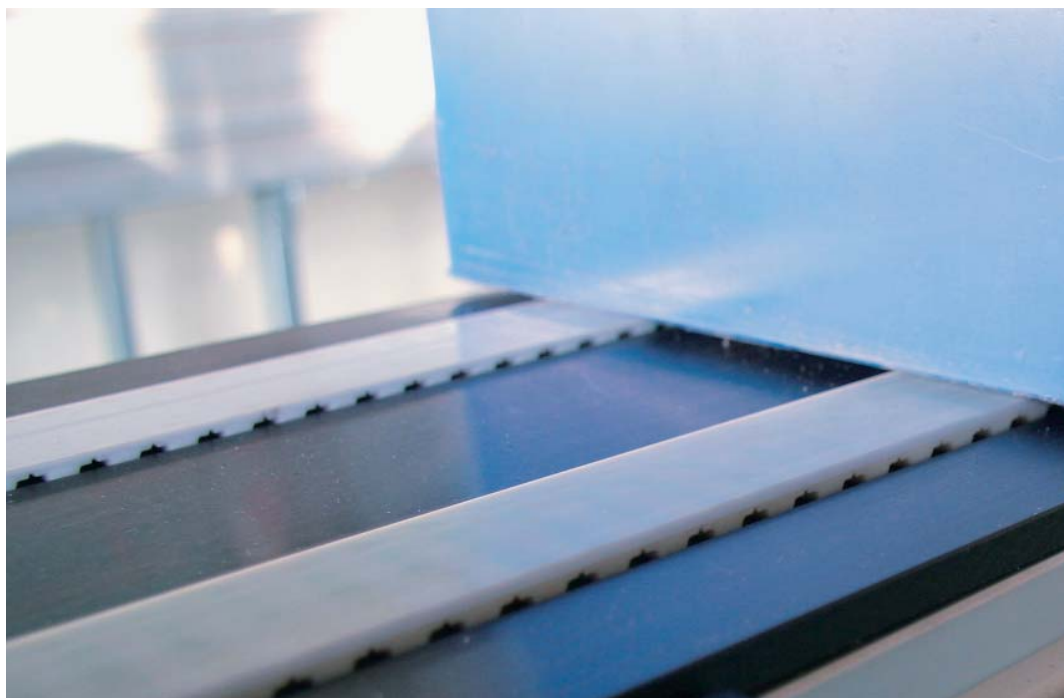

Polyurethane covers







		FAB	FAC-C	FAC-W	FAF	FAS	F
Material		TPU	TPU	TPU	TPU	TPU	T
Surface		smooth	cone top	cone top	fish/herringbone	saw tooth	s
Color		white	cobalt blue	white	white	white	c
Food approval ¹		yes	yes	yes	yes	yes	y
Hardness	Shore A	85	85	85	85	85	8
Temperature range	°C	-30 – 80	0 – 100	0 – 100	-30 – 80	-30 – 80	-3
	°F	-22 – 176	32 – 212	32 – 212	-22 – 176	-22 – 176	-2
Thickness	mm	0.8	1.1	1.1	3.0	0.7	0
	inch	0.03	0.04	0.04	0.12	0.03	0
Product features / special properties		<ul style="list-style-type: none"> • Abrasion-resistant • Dimensionally stable • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Non-adhesive • Laterally stable • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Non-adhesive • Laterally stable • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Adhesive • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Adhesive • Oil- and fat-resistant 	<ul style="list-style-type: none"> • • •







		POF-R55	POF-T60	POF-C85	POF-W85	POF-N92	P
Material		TPU	PU	PU	PU	PU	T
Surface		smooth	smooth	smooth	smooth	smooth	s
Color		red	transparent	cobalt blue	white	natural white	c
Food approval ¹		no	no	yes	yes	no	•
Hardness	Shore A	55	60	85	85	92	8
Temperature range	°C	-30 – 60	-30 – 80	-30 – 80	-30 – 80	-30 – 80	-2
	°F	-22 – 140	-22 – 176	-22 – 176	-22 – 176	-4 – 176	-
Thickness	mm	2.0 / 3.0	2.0 / 3.0	1.3	2.0 / 3.0 / 4.0 / 5.0	2.0 / 4.0	2
	inch	0.08 / 0.12	0.08 / 0.12	0.05	0.08 / 0.12 / 0.16 / 0.2	0.08 / 0.16	0
Product features / special properties		<ul style="list-style-type: none"> • Abrasion-resistant • High coefficient of friction surface • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Chemical- and oil-resistant • Adhesive 	<ul style="list-style-type: none"> • Abrasion-resistant • Chemical- and oil-resistant • Adhesive 	<ul style="list-style-type: none"> • Abrasion-resistant • Chemical- and oil-resistant • Wear-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Chemical- and oil-resistant • Non-adhesive • Wear-resistant 	<ul style="list-style-type: none"> • •

¹ The food approval statement refers to the respective HabaSYNC® cover







• Only FDA approved; no EU conformity




For detailed declarations of compliance, please contact Habasit: www.habasit.com

	FAS-C	FAW	FMB-C	FNB	FNO-C	HNB
						
	TPU	TPU	TPU	TPU	TPU	TPU
	saw tooth	waffle	silk finish	smooth	quadrangular	smooth
	cobalt blue	white	cobalt blue	white	cobalt blue	green
	yes	yes	yes	yes	yes	yes
	85	85	85	93	93	90
	-30 – 80	-30 – 80	-30 – 80	-15 – 80	-30 – 80	-15 – 80
	-22 – 176	-22 – 176	-22 – 176	-5 – 176	-22 – 176	-5 – 176
	0.7	0.6	0.5	0.8	0.7	0.7
	0.03	0.02	0.02	0.03	0.03	0.03
	<ul style="list-style-type: none"> • Abrasion-resistant • Adhesive • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Adhesive • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Cut-resistant • Oil- and fat-resistant • Non-adhesive 	<ul style="list-style-type: none"> • Cut-resistant • Easy cleanability • Oil- and fat-resistant • Non-adhesive 	<ul style="list-style-type: none"> • Cut-resistant • Oil- and fat-resistant • Non-adhesive

	PU-SP	PU D44	PU foil 70	PU foil 85	T/NPW	WAL-C
						
	TPU	TPU	TPU	TPU	TPU	TPU
	spike	smooth	smooth	smooth	pimple top	longitudinal groove
	cobalt blue	brown	transparent	transparent	white	cobalt blue
	•	no	yes	no	yes	yes
	86	80	70	85	80	85
	-20 – 100	-10 – 60	-30 – 80	-30 – 80	-20 – 60	-30 – 80
	-4 – 212	14 – 140	-22 – 176	-22 – 176	-4 – 140	-22 – 176
	2.2	1.0 / 2.0 / 3.0 / 4.0 / 5.0	6.0	2.0	1.2	2.1
	0.09	0.04 / 0.08 / 0.12 / 0.16 / 0.2	0.24	0.08	0.05	0.08
	<ul style="list-style-type: none"> • Abrasion-resistant • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • High acceleration • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Slip-proof 	<ul style="list-style-type: none"> • Abrasion-resistant • Constant coefficient of friction

Elastomer covers

	Correx	CT	EAT	HAB	HAG	H	
							
Material	Natural rubber	NBR	NBR	NBR	NBR	E	
Surface	smooth	textile structure	textile structure	smooth	grip structure	l	
Color	beige	gray	black	green	green	g	
Food approval ¹	no	no	no	no	no	n	
Hardness Shore A	40	60	77	75	55	5	
Temperature range	°C	-15 – 70	0 – 60	0 – 100	0 – 100	0 – 100	-3
	°F	5 – 158	32 – 140	32 – 212	32 – 212	32 – 212	-2
Thickness	mm	4.0 / 6.0 / 8.0 / 10.0	0.85	1.1	0.8	4.7	1
	inch	0.16 / 0.24 / 0.31 / 0.39	0.03	0.04	0.03	0.18	0
Product features / special properties	<ul style="list-style-type: none"> • Very adhesive • High coefficient of friction 	<ul style="list-style-type: none"> • Constant coefficient of friction • Dimensionally stable 	<ul style="list-style-type: none"> • Abrasion-resistant • Electrically conductive 	<ul style="list-style-type: none"> • Highly adhesive • Constant coefficient of friction • Abrasion-resistant • Oil-resistant 	<ul style="list-style-type: none"> • Highly adhesive • Constant coefficient of friction • Abrasion-resistant • Oil and chemical-resistant 	<ul style="list-style-type: none"> • • 	

	Linatrilite	RP400	SAR	
				
Material	Nitrile	Elastomere	EPDM	
Surface	smooth	smooth	rough textile structure	
Color	orange	yellow	anthracite	
Food approval ¹	no	no	no	
Hardness Shore A	55	39	69	
Temperature range	°C	-20 – 110	-10 – 80	-30 – 70
	°F	-4 – 230	14 – 176	-22 – 158
Thickness	mm	3.0 / 5.0	2.0 / 3.0	0.7
	inch	0.12 / 0.2	0.08 / 0.12	0.03
Product features / special properties	<ul style="list-style-type: none"> • Abrasion-resistant • High acceleration • Oil- and fat-resistant 	<ul style="list-style-type: none"> • High abrasion resistance • High acceleration • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Constant and gentle positive grip • Ozone-resistant • Ultra-violet light-resistant 	







HAL	HAR	HAT	HAT-W	Linaplus	Linatex HM
EPDM	NBR	NBR	NBR	Natural rubber	Natural rubber
longitudinal groove	rough textile structure	textile structure	textile structure	smooth	smooth
green	green	green	light green	white	red
no	no	no	no	•	no
50	70	60	60	38	38
-30 – 100	-20 – 100	0 – 100	0 – 100	-40 – 70	-40 – 70
-22 – 212	-4 – 212	32 – 212	32 – 212	-44 – 158	-44 – 158
1.2	0.7	1.25	1.0 / 2.0 / 3.0 / 4.0	3.0	2.0 / 3.0 / 5.0 / 6.0 / 8.0
0.05	0.03	0.05	0.04 / 0.08 / 0.12 / 0.16	0.12	0.08 / 0.12 / 0.2 / 0.24 / 0.31
<ul style="list-style-type: none"> • Highly adhesive • Constant coefficient of friction • Temperature variations-resistant 	<ul style="list-style-type: none"> • Highly adhesive • Constant coefficient of friction • Oil and chemical-resistant 	<ul style="list-style-type: none"> • Highly adhesive • Constant coefficient of friction • Abrasion-resistant • Oil and chemical-resistant 	<ul style="list-style-type: none"> • Highly adhesive • Constant coefficient of friction • Abrasion-resistant • Oil and chemical-resistant 	<ul style="list-style-type: none"> • Highly adhesive • High coefficient of friction surface 	<ul style="list-style-type: none"> • Highly adhesive • Constant coefficient of friction. • Water-resistant • Cut- and wear-resistant

¹ The food approval statement refers to the respective HabaSYNC® cover





• Only FDA approved; no EU conformity







For detailed declarations of compliance, please contact Habasit: www.habasit.com


Polyvinyl chloride covers

		FAB-CV	NAB-DV	NAB-SBV	NAB-WV	NAG-DV	N
							
Material		PVC	PVC	PVC	PVC	PVC	P
Surface		matt	smooth	smooth	smooth	grip structure	s
Color		blue	dark green	black	white	dark green	b
Food approval ¹		yes	no	no	yes	no	n
Hardness	Shore A	86	45	45	45	45	4
Temperature range	°C	-10 – 80	-10 – 60	0 – 70	-10 – 70	-10 – 70	0
	°F	14 – 176	14 – 140	32 – 158	14 – 158	14 – 158	3
Thickness	mm	0.4	1.2	0.9	0.6 – 1.0	3.8	3
	inch	0.16	0.05	0.04	0.02 – 0.04	0.15	0
Product features / special properties		<ul style="list-style-type: none"> • Abrasion-resistant • Medium adhesive • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Metal detection units suitable 	<ul style="list-style-type: none"> • Adhesive • Flame retardant 	<ul style="list-style-type: none"> • Adhesive • Longitudinally flexible 	<ul style="list-style-type: none"> • Adhesive • Super grip 	<ul style="list-style-type: none"> • •

Polyester covers







		Felt-Top	G-NB	GNB-W	MAN	MNN	N
							
Material		PET	PET	PET	PET	PET/PP	P
Surface		non-woven (fleece)	non-woven (fleece)	impregnated fleece	non-woven (fleece)	non-woven (fleece)	ir
Color		white	black	white	anthracite	beige	b
Food approval ¹		yes	no	•	no	no	n
Hardness	Shore A	40	80	65	50	40	9
Temperature range	°C	-20 – 70	-10 – 80	-10 – 80	-30 – 60	-20 – 60	0
	°F	-4 – 158	-14 – 176	14 – 176	-22 – 140	-4 – 140	3
Thickness	mm	2.0	0.8 / 2.0	0.75	0.8	0.9	1
	inch	0.08	0.03 / 0.08	0.03	0.03	0.04	0
Product features / special properties		<ul style="list-style-type: none"> • Good release • Non-adhesive 	<ul style="list-style-type: none"> • Antistatic • Cut-resistant • Non-adhesive • Wear-resistant edges 	<ul style="list-style-type: none"> • Cut-resistant • Non-adhesive • Wear-resistant edges • Non-marking 	<ul style="list-style-type: none"> • Abrasion-resistant • Dimensionally stable 	<ul style="list-style-type: none"> • Abrasion-resistant • Dimensionally stable • Non-marking 	<ul style="list-style-type: none"> • •

NAJ-SBV	NAQ-BV	NAS-DV	PVC foil	SAQ	WAG-G
					
PVC	PVC	PVC	PVC	PVC	PVC
sine wave structure	quadrangular	saw tooth	smooth	quadrangular	basket weave
black	black	dark green	transparent	anthracite	dark green
no	no	no	no	no	no
45	45	45	70	72	50
0 – 70	-10 – 70	-10 – 70	0 – 60	-10 – 60	-10 – 60
<i>32 – 158</i>	<i>14 – 158</i>	<i>14 – 158</i>	<i>32 – 140</i>	<i>14 – 140</i>	<i>14 – 140</i>
3.0	1.1	5.0	2.0	0.8	1.6
<i>0.12</i>	<i>0.04</i>	<i>0.2</i>	<i>0.08</i>	<i>0.03</i>	<i>0.06</i>
<ul style="list-style-type: none"> • Flame retardant • Super grip/adhesive surface 	<ul style="list-style-type: none"> • Constant and gentle positive grip 	<ul style="list-style-type: none"> • Adhesive, • Easy release property 	<ul style="list-style-type: none"> • Adhesive • Resistant against acids and bases 	<ul style="list-style-type: none"> • Constant coefficient of friction • Gentle positive grip 	<ul style="list-style-type: none"> • Highly adhesive

NNT-B

PET
impregnated fabric
black
no
90
0 – 80
<i>32 – 176</i>
1.3
<i>0.05</i>
<ul style="list-style-type: none"> • Abrasion-resistant • Non-adhesive




¹ The food approval statement refers to the respective HabaSYNC® cover
 • Only FDA approved; no EU conformity
 For detailed declarations of compliance, please contact Habasit: www.habasit.com


Foam covers



		Cellular rub	Foam rubber rough	Foam rubber smooth	PU foam	Sylomer blue	S
							
Material		Polychloroprene	Natural rubber	Natural rubber	PU	PU	P
Surface		closed cell	open cell	open cell	smooth	smooth	s
Color		black	orange	orange	beige	blue	b
Food approval ¹		no	no	no	no	no	n
Density ²	kg / m ³	250	200	200	350	220	4
Temperature range	°C	-20 – 60	-20 – 65	-20 – 65	-30 – 80	-30 – 70	-3
	°F	5 – 176	-4 – 149	-4 – 149	-22 – 176	-22 – 158	-2
Thickness	mm	4 / 5 / 6 / 8 / 10	10 / 15 / 20	10 / 15 / 20	1.0 – 25.0	5 / 10 / 12	5
	inch	0.16 / 0.2 / 0.24 / 0.3 / 0.39	0.39 / 0.59 / 0.79	0.39 / 0.59 / 0.79	0.04 – 0.98	0.2 / 0.39 / 0.47	0
Product features / special properties		<ul style="list-style-type: none"> • Abrasion-resistant • Antistatic • Chemically resistant 	<ul style="list-style-type: none"> • Adhesive • Oil- and fat-resistant • Soft and resilient 	<ul style="list-style-type: none"> • Adhesive • Oil- and fat-resistant • Soft and resilient 	<ul style="list-style-type: none"> • Chemically resistant • Hydrolysis-resistant • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Abrasion-resistant • Chemically resistant • Oil- and fat-resistant • Very flexible and compressible 	<ul style="list-style-type: none"> • •

Special covers

		Artificial leather	Split chrome leather	FNT	Heatmate ³	PA fabric heavy	P
							
Material		PET/TPU	Leather	PET/CO	Aramide	PA	P
Surface		smooth	leather structure	textile structure	non-woven	textile structure	g
Color		gray	light gray	white	yellow	green	g
Food approval ¹		no	no	yes	no	no	n
Hardness	Shore A	50	NA	NA	NA	NA	N
Temperature range	°C	0 – 60	0 – 60	-30 – 80	-20 – 426	-30 – 80	-3
	°F	32 – 140	32 – 140	-22 – 176	-4 – 799	-22 – 176	-2
Thickness	mm	1.0 – 2.0	2.0 – 3.0	1.0	5.0	0.75	0
	inch	0.04 – 0.08	0.08 – 0.12	0.04	0.2	0.03	0
Product features / special properties		<ul style="list-style-type: none"> • Oil-resistant • Non-adhesive 	<ul style="list-style-type: none"> • Abrasion-resistant • Constant grip and release property • Oil- and fat-resistant 	<ul style="list-style-type: none"> • Easy release property • Non-adhesive 	<ul style="list-style-type: none"> • Excellent heat and flame-resistant • Non-adhesive 	<ul style="list-style-type: none"> • High abrasion resistance • Non-adhesive 	<ul style="list-style-type: none"> • •

Sylomer brown	Sylomer green	Sylomer yellow
		
PU	PU	PU
smooth	smooth	smooth
brown	green	yellow
no	no	no
400	300	160
-30 – 70	-30 – 70	-30 – 70
-22 – 158	-22 – 158	-22 – 158
5 / 8 / 10 / 12 / 15	2 / 3 / 5 / 8 / 10 / 12 / 15 / 20	5 / 10
0.2 / 0.31 / 0.39 / 0.47 / 0.59	0.08 / 0.12 / 0.1 / 0.31 / 0.39 / 0.47 / 0.59 / 0.79	0.2 / 0.39
<ul style="list-style-type: none"> Chemically resistant Oil- and fat-resistant Very flexible and compressible 	<ul style="list-style-type: none"> Chemically resistant Oil- and fat-resistant Very flexible and compressible 	<ul style="list-style-type: none"> Chemically resistant Oil- and fat-resistant Very soft and compressible

	PU yellow	
		
Material	PU	
Surface	closed cell	
Color	yellow	
FDA	no	
Hardness Shore A	50	
Temperature range °C	-10 – 60	
°F	14 – 140	
Thickness	mm	2 / 3 / 4 / 5 / 6 / 8
	inch	0.08 / 0.12 / 0.16 / 0.2 / 0.24
Product features / special properties	<ul style="list-style-type: none"> Abrasion-resistant Oil-resistant Resistant against chemicals and solvents 	

PTFE foil	Silicone blue
	
PTFE	Silicone
glossy	smooth
gray	blue
no	•
NA	50
-30 – 80	-30 – 80
-22 – 176	-22 – 176
0.25	1.0
0.03	0.04
<ul style="list-style-type: none"> Low coefficient of friction Ideal in accumulation 	<ul style="list-style-type: none"> Abrasion-resistant High adhesive/easy-release property

¹ The food approval statement refers to the respective Habasync® cover

• Only FDA approved; no EU conformity

For detailed declarations of compliance, please contact Habasit: www.habasit.com

² Exact density is based on application requirements

³ Cover temperature far exceeds base belt temperature

Austria

Habasit GmbH
Wien
Phone: +43 1 690 66
www.habasit.at

Belgium

Habasit Belgium N.V.
Zaventem
Phone: +32 27 250 430
www.habasit.be

Canada

Habasit Canada Ltd.
Oakville
Phone: +1 905 827 41 31
www.habasit.ca

China

Habasit East Asia Ltd.
Hong Kong
Phone: +85 221 450 150
www.habasit.com.hk

Habasit (Shanghai) Co. Ltd.
Shanghai
Phone: +8621 5488 1228
Phone: +8621 5488 1218
www.habasit.com.hk

France

Habasit France S.A.S.
Mulhouse
Phone: +33 389 338 903
www.habasit.fr

Germany

Habasit GmbH
Eppertshausen
Phone: +49 6071 969 0
www.habasit.de

India

Habasit-lakoka Pvt. Ltd.
Coimbatore
Phone: +91 422 262 78 79
www.habasitlakoka.com

Italy

Habasit Italiana SpA
Customer Care:
Phone: 199 199 333
For int. calls: +39 0438 911 444
www.habasit.it

Japan

Habasit Nippon Co. Ltd.
Yokohama
Phone: +81 45 476 0371
www.habasit.co.jp

Netherlands

Habasit Netherlands BV
Nijkerk
Phone: +31 332 472 030
www.habasit.nl

New Zealand

Habasit Australasia Ltd.
Hornby
Phone: +64 3348 5600
www.habasit.co.nz

Norway

Habasit Norge A/S, Oslo
Phone: +47 815 58 458
www.habasit.no

Poland

Habasit Polska Sp. zo.o.
Dąbrowa Górnicza
Phone: +48 32639 02 40
www.habasit.pl

Russia

OOO Habasit Ltd.
St. Petersburg
Phone: +7 812 600 40 80
www.habasit.ru

Singapore

Habasit Far East Pte. Ltd.
Singapore
Phone: +65 686 255 66
www.habasit.com.sg

Spain

Habasit Hispanica S.A.
Barberà del Vallès
Phone: +34 937 191 912
www.habasit.es

Sweden

Habasit AB
Hindas
Phone: +46 30 122 600
www.habasit.se

Switzerland

Habasit GmbH
Reinach
Phone: +41 61 577 51 00
www.habasit.ch

Taiwan

Habasit Rossi (Taiwan) Ltd.
Taipei Hsien
Phone: +886 2 2267 0538
www.habasit.com.tw

Turkey

Habasit Kayis San. Ve Tic. Ltd. Sti.
Yenibosna-Bahcelievler-Istanbul
Phone: +90 212 654 94 04
www.habasit.com.tr

Ukraine

Habasit Ukraina
Vinnica
Phone: +38 0432 58 47 35
www.habasit.ua

United Kingdom and Ireland

Habasit (UK) Ltd.
Silsden
Phone: +44 844 835 9555
www.habasit.co.uk

USA

Habasit America
Conveyor belts, power
transmission belts, gearmotors
Suwanee, Georgia
Phone: +1 800 458 6431
www.habasitamerica.com

Habasit America
Seamless belts, timing belts
Middletown, Connecticut
Phone: +1 860 632 2211
www.habasitamerica.com

Rossi is one of Europe's largest manufacturers of gear reducers, gearmotors, inverters, standard and brakemotors, and is a member of the Habasit Group.

Rossi S.p.A.
Via Emilia Ovest 915/A
41123 Modena – Italy
Phone: +39 059 33 02 88
www.rossi-group.com
info@rossi-group.com

Headquarters

Habasit AG
Römerstrasse 1
CH-4153 Reinach, Switzerland
Phone +41 61 715 15 15
Fax +41 61 715 15 55
E-mail info@habasit.com
www.habasit.com

Registered trademarks
Copyright Habasit AG
Subject to alterations
Printed in Switzerland
Publication data:
4282BRO.TIM-en0913HQR