

Main industry segments

Automation, Materials Handling



Belt applications

General conveying for higher strength and precision, power transmission, wet conveying applications

Description

Trapezoid teeth with a 40° tooth angle are spaced on 0.375 inch (9.5 mm) centers.

White thermoplastic polyurethane with 92 Shore A provides wear resistance on the tooth side and protects the stainless steel tensile member. Our material also provides high lubricity, which yields low noise and vibration meshing in and out of the drive pulley. The stainless steel tensile member is resistant to influences caused by wet environment.

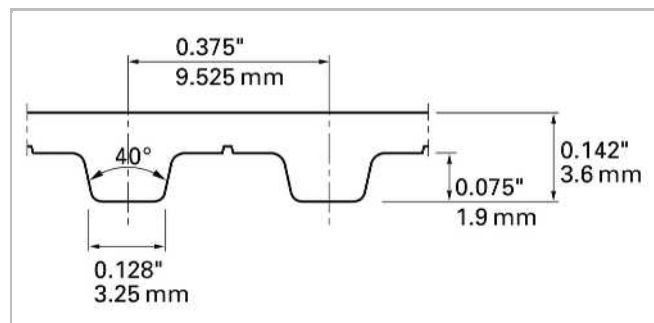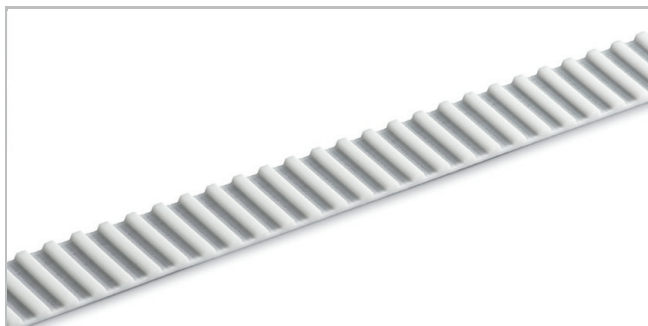

Sketch of basic shape according to DIN ISO 5296

Belt data

Belt slitting width, nominal		Admissible tensile force, truly endless belt		Ultimate tensile strength		Tensile force for 1% elongation		Mass of belt (belt weight)	
毫米	英寸	N	lbf	N	lbf	N	lbf	kg/m	lb/ft
25	1.00	1375	309	7410	1666	3435	772	0.10	0.07

Standard belt widths are equal to, or multiples of the nominal belt slitting width.

Maximum belt width (150 mm / 6 inch): All **non-standard belt widths** can be slitted on request.

Temperature range of matrix material: -20 to 80 °C (-4 to 176 °F)

The tensile force for 1% elongation (k1% static) per unit of width determines the stress-strain behavior of the belt. It defines the resulting strain if a certain stress is applied and vice versa. This value corresponds to the belt without joint.

The admissible tensile force of a running belt is defined by the strength of the joint or by the strength of the belt without joint. Habasit defines an admissible belt force (without joint) for all belts, which always corresponds with a belt elongation of 0.4 %. Joined belts are calculated with half admissible force. Please contact Habasit for detailed information and calculations.

All data are approximate values under **standard climatic conditions**: 23 °C / 73 °F, 50% relative humidity (DIN 50005 / ISO 554), and are based on the Master Joining Method.


Unit load table

RPM	F _i	M _i	P _i	RPM	F _i	M _i	P _i	RPM	F _i	M _i	P _i
[min ⁻¹]	[N/cm]	[Nm/cm]	[W/cm]	[min ⁻¹]	[N/cm]	[Nm/cm]	[W/cm]	[min ⁻¹]	[N/cm]	[Nm/cm]	[W/cm]
0	29.40	0.047	0.000	1000	19.80	0.032	3.309	2800	14.20	0.023	6.685
20	28.96	0.046	0.096	1100	19.32	0.031	3.548	3000	13.80	0.022	6.912
40	28.56	0.046	0.191	1200	18.88	0.030	3.770	3200	13.44	0.022	7.238
60	28.20	0.045	0.281	1300	18.48	0.030	4.030	3400	13.08	0.021	7.406
80	27.84	0.044	0.372	1400	18.08	0.029	4.222	3600	12.76	0.020	7.691
100	27.48	0.044	0.457	1500	17.72	0.028	4.461	3800	12.44	0.020	7.959
200	26.00	0.042	0.871	1600	17.36	0.028	4.691	4000	12.12	0.019	8.042
300	24.84	0.040	1.244	1700	17.04	0.027	4.842	4500	11.40	0.018	8.482
400	23.80	0.038	1.592	1800	16.72	0.027	5.052	5000	10.76	0.017	9.006
500	22.96	0.036	1.906	1900	16.40	0.026	5.173	5500	10.20	0.016	9.446
600	22.20	0.035	2.212	2000	16.12	0.026	5.362	6000	9.68	0.015	9.550
700	21.48	0.034	2.522	2200	15.60	0.025	5.714	6500	9.20	0.015	10.07
800	20.88	0.033	2.781	2400	15.12	0.024	6.032				
900	20.32	0.032	3.054	2600	14.64	0.023	6.317				


Belt options

Description		ØA		n _A	ØB		n _B
		毫米	英寸		毫米	英寸	
Tooth side: unprocessed matrix material	U	70	2.76	25	70	2.76	18
Conveying side: unprocessed matrix material	U						
Tooth side: Polyamide fabric, green	P	70	2.76	25	70	2.76	18
Conveying side: unprocessed matrix material	U						

For **detailed material properties**
(e.g. coefficient of friction, colors, etc.)
please contact your Habasit representative.

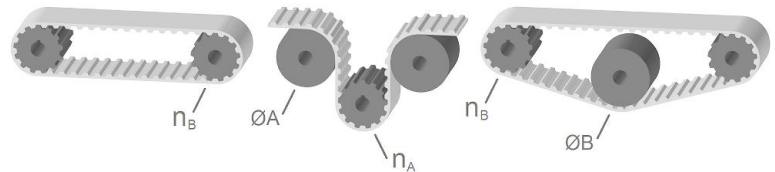

- A** = with counter flection
- B** = without counter flection



Truly endless (T)

聲明

產品應用聲明(適用於所有哈伯斯特 Habasit 產品及所有產品資料表上提到的)

“這個聲明是由哈伯斯特 Habasit 及代表其附屬公司、董事、僱員、代理人和承包商(以下統稱“HABASIT”)及與本文提到的產品(“產品”)關聯。請應仔細閱讀安全注意事項、任何建議的安全警告必須嚴格遵守!請參考此哈伯斯特 Habasit 目錄內的“安全警告”,並參考相關安裝和操作手冊。所有關於應用、產品的使用、產品的性能的指示及資料,皆是盡義務和關注性的建議,只為了推薦用途,對於它們的準確性、其完整性及在特定情況下的適用性,均不可被視作陳述、保證、或承諾。本文提供的數據只是基於實驗室工作所在標準環境下使用小型測試工具運作取得,它們不一定與在工業運作中的產品表現相符合。新的知識及經驗可能導致我們在短時間內為產品做出必須的修正及變更,我們保留在不做任何通知的情況下,修改及變更相關資料的權利。除非HABASIT明確地保證(此保證具獨立性、排他性,並取代所有其他的、明示或暗示的保證),否則產品是如購買的實物一樣。HABASIT否認所有其他保證,包括明示或暗示但不限於適銷性,針對特定用途的適用性,非侵權,或從處理或使用過程中產生的保證,或貿易慣例,所有這一切,茲排除在適用法律允許的範圍內。由於產品的使用情況並非在瑞士哈伯斯特及其附屬公司可控制的範圍內,我們無法對產品的適用性、可靠性、其工作能力、製程結果、產量、製品、潛在缺點、損害、相因而生的損害及深遠的損害負任何責任。註:以上一切聲明以英文版本的實際內容為準。