


# High-Performance Steel Wrapper Belt GK3CP 2DPU/1DPU

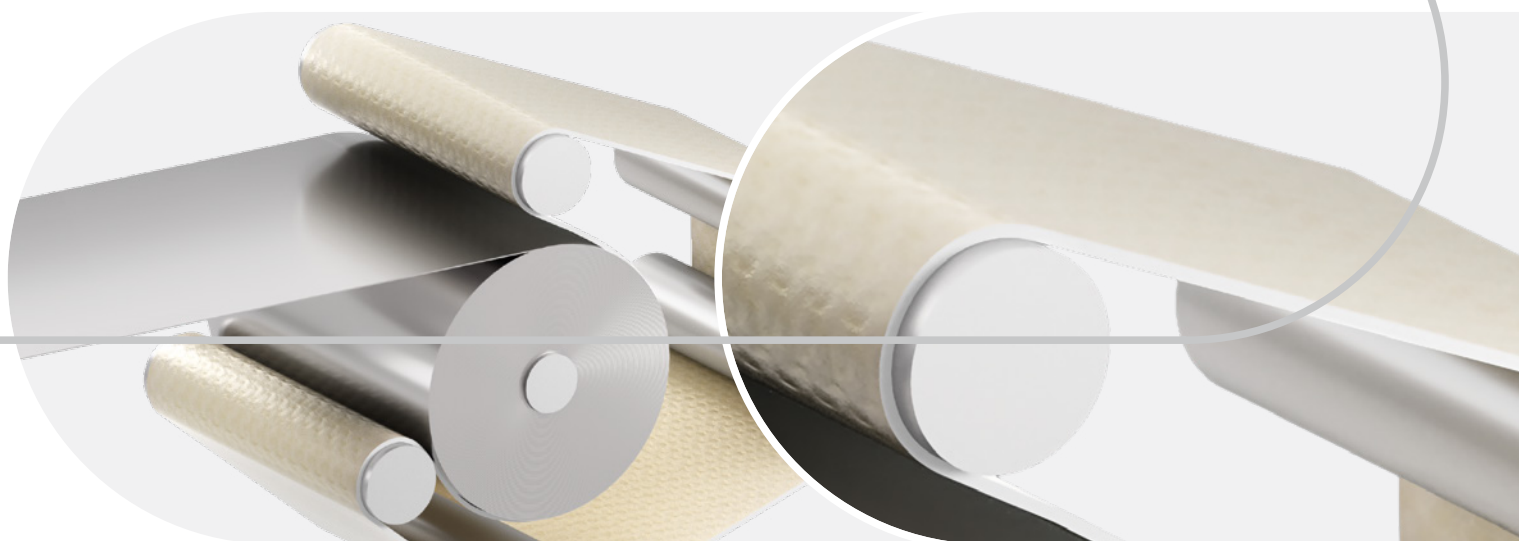

The new GK3CP 2DPU/1DPU is a high-performance belt for steel wrapper (coil winder) applications in the metal industry, where longevity is appreciated as a way to avoid expensive downtime. The belt's endless woven carcass with duroplastic urethane (DPU) covers provides an extremely durable, splice-free conveyor with high cut and impact resistance in a very demanding application, where it is impacted by the leading edges of metal coils.


The GK3CP 2DPU/1DPU is particularly suitable for steel wrapper and coil winder applications found in plants producing steel, copper and aluminum rolls:

- Highly cut-resistant high-grip cover
- Manufactured in lengths from 2.5 m to 20.0 m
- Widths available of up to 1.9 m with cut edges, or 2.0 m with uncut edges
- Joining is not necessary since each belt is made endless woven to the required length

# High-Performance Steel Wrapper Belt GK3CP 2DPU/1DPU

Key features	Your benefits
<ul style="list-style-type: none"> <li>• Cut and gouge resistant cover with reliable grip</li> </ul>	<ul style="list-style-type: none"> <li>• Durable, maintenance-free processes</li> <li>• Long belt service life</li> <li>• Low lifecycle costs</li> </ul>
<ul style="list-style-type: none"> <li>• High-strength endless woven PET fabric</li> </ul>	<ul style="list-style-type: none"> <li>• Low stretch characteristics</li> <li>• Reduced re-tensioning and downtimes</li> <li>• Good belt tracking</li> <li>• Low maintenance costs</li> </ul>
<ul style="list-style-type: none"> <li>• Chemical resistant DPU cover</li> </ul>	<ul style="list-style-type: none"> <li>• No hardening or cracking</li> <li>• Long belt service life</li> </ul>
<ul style="list-style-type: none"> <li>• Belt design flexibility: cover thickness and materials options</li> </ul>	<ul style="list-style-type: none"> <li>• A customized belt for your specific application</li> </ul>

## Cross-section

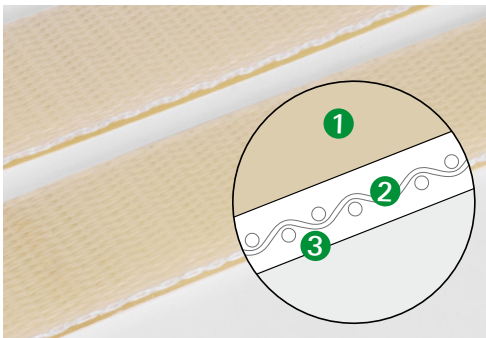

- 1 Conveying side: DPU covered
- 2 Traction layer: PET fabric
- 3 Running side: DPU covered

## Technical key data

Type	Thickness		Tensile force for 1% elongation (relaxed)		Color of conveying side
	mm	inch	N/mm	lbs/inch	
GK3CP 2DPU/1DPU	6.0	0.24	29	167	Transparent

Information provided herein do not constitute legal representations or warranties and may change without notice. Please refer to the specifications/disclaimers provided in the respective product data sheets.

For further information  
choose country selection  
Habasit Worldwide on:

[www.habasit.com](http://www.habasit.com)

Habasit AG

CH-4153 Reinach-Basel  
Phone: +41 61 715 15 15  
Fax: +41 61 715 15 55  
E-mail: [info@habasit.com](mailto:info@habasit.com)

Copyright Habasit AG  
Subject to alterations

4397SRF.SEB-en0716HOR