Habasit – Solutions in motion



S-200HRN Power Transmission Belt




S-200HRN is a new member of Habasit's wellknown and highly rated Polyamide power transmission belt range. The new product is particularly suitable as driving belt for medium performance OE-spinning and carding applications.

It perfectly combines robustness, long belt life, high performance and best in class life-cycle costs.

Tests at spinning mills have confirmed:

- High abrasion resistance of belt surfaces and constant grip
- Constant speed of spindles, high yarn quality and machine performance
- Long belt service life

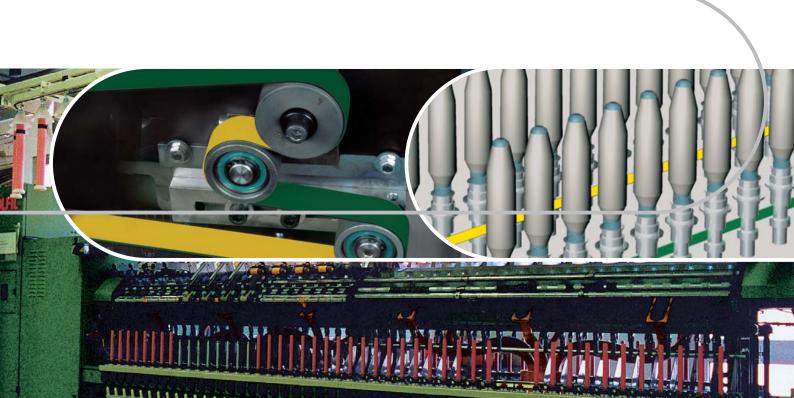


Performance summary

S-200HRN: the optimal add-on to Habasit's proven Polyamide power transmission belt range

Key features	Your benefits
Durable, abrasion resistant and proven NBR covers	 → High abrasion resistance → Reliable and consistent grip → Perfectly suitable as driving belt for spindles/rotors; uniform machine speed and constant yarn quality → Long belt life
 Robust and proven Polyamide traction layer, forgiving in case of short term overload 	 → No re-tensioning required → No machine downtimes → Less maintenance cost → High machine output
Good flex-fatigue properties	→ Low energy consumption→ Long belt life
Good belt tracking	→ No re-adjustments required

Technical key data

Туре	Thickness		Nominal peripheral force per unit of width		Color of pulley side/reverse side
	mm	inch	N/mm	lbs./in.	
S-200HRN	2.0	0.08	23	131	yellow/green

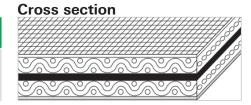

For further information, please contact your local Habasit representative: www.habasit.com

This disclaimer is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively, "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals. All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice. EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW, BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.



Headquarters
Habasit AG
CH-4153 Reinach-Basel
Phone +41 61 715 15 15
Fax +41 61 715 15 55
E-mail info@habasit.com
www.habasit.com

Copyright Habasit AG Subject to alterations Printed in Switzerland Publication data: 4356FLY.PTB-en0114HQR